


FEATURES and BENEFITS


- Made in the USA of 100% U.S. components
- Lead free
- EnergyStar® rated and labeled
- Aesthetically-pleasing exterior frame design
- All-welded frame and sash
- DP50 performance levels
- Dual co-extruded weatherstripping
- Full complement of accessory profiles
- Factory applied WM-180 brick mould or 5/4 x4 exterior trim available with nail fin
- Can accommodate triple-pane glass unit
- Integral nail fin and J-channel
- Full 1 3/4" integral nail fin
- 2 7/8" frame width
- Multi-chambered vinyl profiles for thermal efficiency
- Stainless steel hardware available



LC
LIGHT COMMERCIAL
RATED



Top View

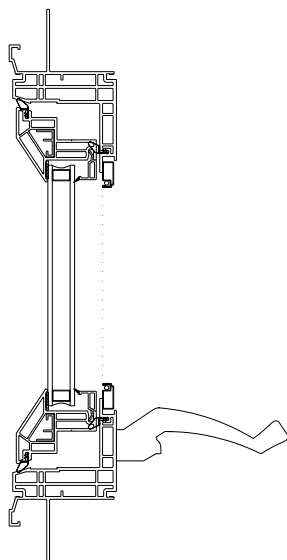

Side View

PERFORMANCE

THERMAL INSULATION

GLASS	Uc Value	R Value	SHGC
Low-E 270	0.27	3.70	0.23
Low-E 366	0.27	3.70	0.17
Low-E 366 w/ i89	0.24	4.17	0.17

STRUCTURAL DATA

Air Infiltration @ 25mph	0.03 cfm/ft ²
Water Penetration	7.50 psf
Uniform Loads	+/- 75.00 psf

AAMA RATING: PG50-C

