



FEATURES and BENEFITS

- Made in the USA of 100% U.S. components
- Lead free
- EnergyStar® rated and labeled
- Aesthetically-pleasing exterior frame design
- All-welded frame and sash
- Constant force balance system
- DP50 performance levels
- Dual weatherstripping
- Full complement of accessory profiles
- Full family of products (hung, slider, and picture)
- Factory applied WM-180 brick mould or 5/4 x4 exterior trim available with nail fin
- Can accommodate triple-pane glass unit
- Integral nail fin and J-channel
- Full 1 3/4" integral nail fin
- FlexScreen available
- Impact-rated grade 50 performance available
- 3 1/4" frame width ideal for replacement installations
- Multi-chambered vinyl profiles for thermal efficiency
- Optimum designed aluminum sash reinforcement
- Sloped sill designed for efficient water evacuation
- Long reach interlock. No colliding or missing
- STC rated 33 available
- Triple weatherstripping

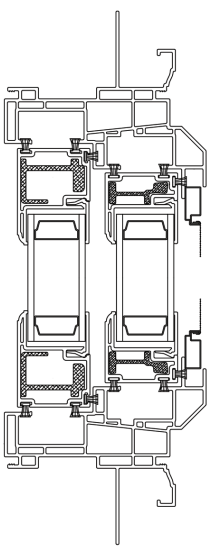

Top View

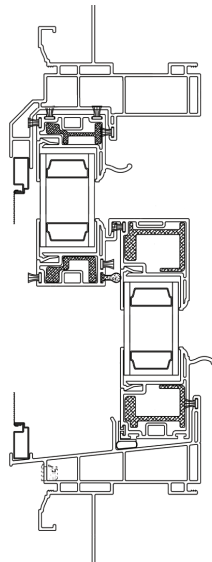

Side View

PERFORMANCE

THERMAL INSULATION

GLASS	Uc Value	R Value	SHGC
Low-E 270	0.29	3.45	0.26
Low-E 366	0.28	3.57	0.19
Low-E 366 w/ei80	0.20	5.00	0.19

STRUCTURAL DATA

Air Infiltration @ 25mph	0.13 cfm/ft²
Water Penetration	7.50 psf
Uniform Loads	+/- 75.00 psf

AAMA RATING: PG50-H

