


FEATURES and BENEFITS

- Made in the USA of 100% U.S. components
- Lead free
- EnergyStar® rated and labeled
- Aesthetically-pleasing exterior frame design
- All-welded frame and sash
- DP50 performance levels
- Dual weatherstripping
- Can accommodate triple-pane glass unit
- Field reversible (prior to installation)
- Full 1 1/4" integral nail fin
- Internal weep system
- Keyed lock handle set (optional)
- Impact-rated grade 50 performance available
- 4 9/16" jamb depth
- Stainless steel, tandem ball-bearing adjustable rollers, lock and striker (standard)
- Twelve gauge steel reinforcing
- Multi-point locking system
- White, beige and clay vinyl and matching hardware finish
- XO, OX, OXO, OXXO configurations
- 12'-0" two-panel center operating units available in a one-piece frame

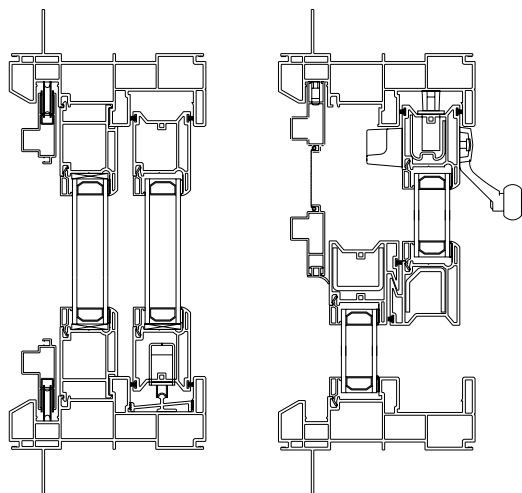

Side View

Top View

PERFORMANCE

THERMAL INSULATION

GLASS	Uc Value	R Value	SHGC
Low-E 270	0.29	3.45	0.26
Low-E 366	0.28	3.57	0.20
Low-E 366 w/ i89	0.24	4.17	0.19

STRUCTURAL DATA

Air Infiltration @ 25mph	0.14 cfm/ft ²
Water Penetration	7.50 psf
Uniform Loads	+/- 75.00 psf

AAMA RATING: PG50-SGD

