



FEATURES and BENEFITS

- Made in the USA of 100% U.S. components
- Lead free
- EnergyStar® rated and labeled
- Aesthetically-pleasing exterior frame design
- All-welded frame, brick-mould look J-channel
- DP50 performance levels
- Full complement of accessory profiles
- Full family of products (single hung, single slider, and picture)
- Full 1 1/2" integral nail fin
- Impact-rated grade 50 performance available

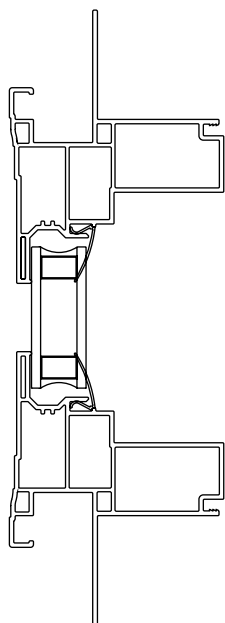

Top View

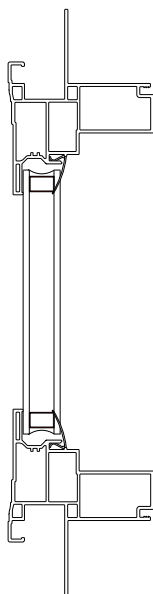

Side View

PERFORMANCE

THERMAL INSULATION

GLASS	Uc Value	R Value	SHGC
Low-E 270	0.28	3.57	0.28
Low-E 366	0.27	3.70	0.21
Low-E 366 w/i89	0.23	4.35	0.21

STRUCTURAL DATA

Air Infiltration @ 25mph	0.01 cfm/ft ²
Water Penetration	7.50 psf
Uniform Loads	+/- 75.00 psf

AAMA RATING: PG50-H

